



# TL-D Standard Colours

## TL-D 18W/54-765 1SL/25

TL-D Standard Colors lamps (tube diameter of 26 mm) create atmospheres from warm white to cool daylight. Lamps with moderate efficacy and color rendering.

### Product data

#### General Information

Cap-Base	G13 [ Medium Bi-Pin Fluorescent]
Bulb Shape	T8 [ 26 mm (T8)]
Life To 10% Failures (Nom)	10000 h
Life To 50% Failures (Nom)	13000 h

#### Light Technical

Color Code	54-765
Luminous Flux (Nom)	1050 lm
Color Designation	Cool Daylight
Lumen Maintenance 10000 h (Nom)	75 %
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 5000 h (Nom)	80 %
Chromaticity Coordinate X (Nom)	315
Chromaticity Coordinate Y (Nom)	341
Correlated Color Temperature (Nom)	6200 K
Color Rendering Index (Nom)	72

#### Operating and Electrical

Power (Rated) (Nom)	18.0 W
Lamp Current (Nom)	0.360 A
Voltage (Nom)	59 V

#### Controls and Dimming

Dimmable	Yes
----------	-----

#### Approval and Application

Energy Efficiency Label (EEL)	B
Mercury (Hg) Content (Nom)	8.0 mg
Energy Consumption kWh/1000 h	22 kWh

#### Product Data


Full product code	871150028609340
Order product name	TL-D 18W/54-765 1SL/25
EAN/UPC - Product	8711500286093
Order code	928048005440
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928048005440
Net Weight (Piece)	72.000 g
ILCOS Code	FD-18/62/2A-E-G13

## TL-D Standard Colours

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Dimensional drawing

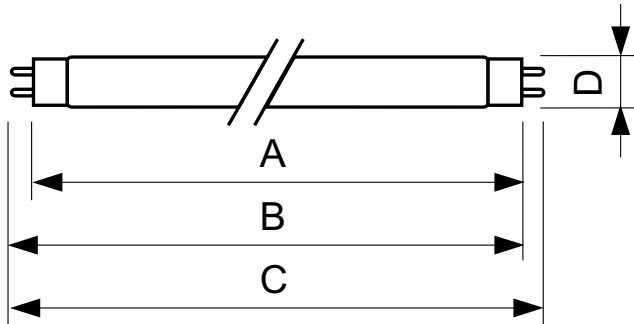

Product	D	A	B	B	C
TL-D 18W/54-765 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

TL-D 18W/54-765

### Photometric data

